


Business Logo Sign Details

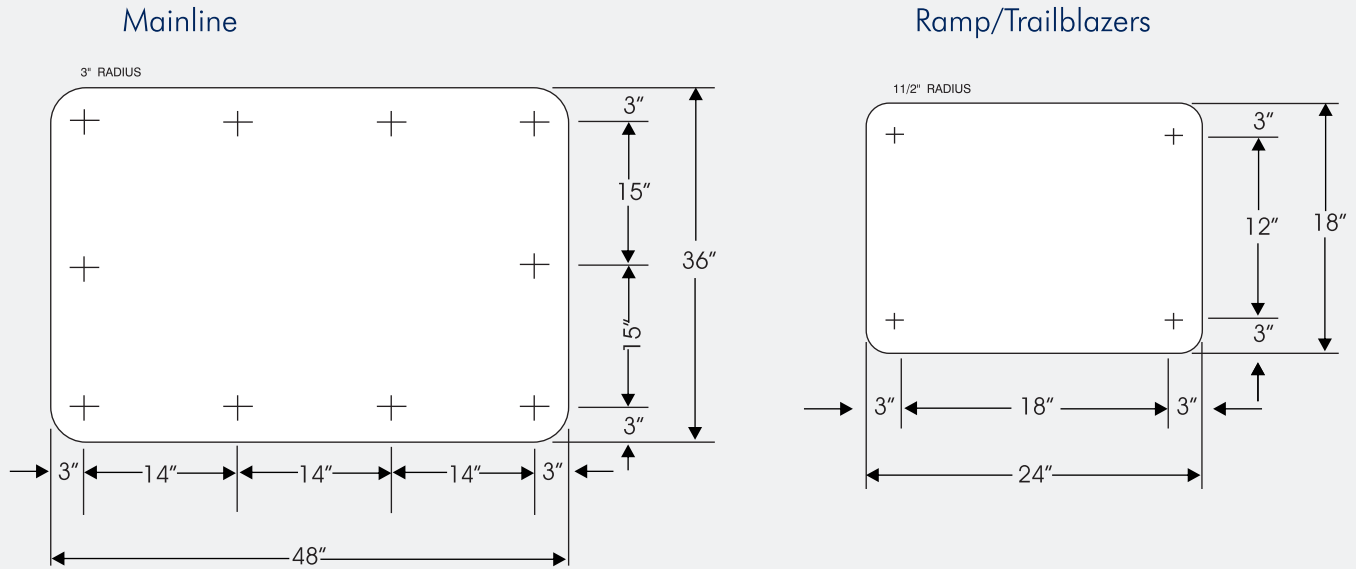

Mainline and Ramp Panels

The mainline and ramp panels shall be fabricated from a single sheet of eighty thousands inch (.080) thickness aluminum alloy, 6061-T6 or 5052-H38.

Trailblazer Panel

The trailblazer panel shall be fabricated from a single sheet of minimum eighty thousands inch (.080) thickness aluminum alloy, 6061-T6 or 5052-H38.

Reflective Sheeting

The aluminum shall be treated before applying the reflective sheeting in accordance with Utah Standard Construction Specifications. High quality Type 9, Diamond Grade reflective sheeting, as defined by Utah Standard Construction Specification, shall be used in all cases and shall be applied with mechanical equipment in accordance with the manufacturer's specifications.

Logo Art Designs

All logo art designs must be approved by Utah Logos prior to production. All Art designs must include a 3/4" (mainline), 3/8" (Ramp/Trailblazer) white border. Designs with a white background and open text must have an inset border.